

LED A Lamp B2B – CL35 Filament 40W E14

Authorized Licensee for TOSHIBA trademark



1. Specification:

A. General Data

Model	Dimmable CL35 Filament 40W E14
Product Code	00501760620A
P/N	MMR-14SWND5C6F08
Rated Voltage	230 VAC
Frequency	50 Hz
Rated Wattage	5 W
Deviation Tolerance of Wattage	±10 %
Power Factor (Input 230V, 50Hz)	0.75(typical)
Maximum Input Current (Input 230V)	32 mA
Start On	<0.5S
Dimmable	YES
Beam Angle	320°
EEL	0.11
Energy Class	A+
Safety requirements	CE
Applicable Environments	Dry and damp locations; Not suitable for totally enclosed fixtures
Incandescent Equivalent	40W
Base	E14

* Dimmer P/N :Jung 266GDE 、Gira 0302 00/I01 、Busch 6513 U-102 、Jung 225 T DE

* Dimming Range : 25%~100%

B. Light Data

Color	Warm White
Color Temperature (CCT)	2700 K
Rated Lumen Output*	470 lm
Color Rendering Index*	80
Efficacy*	94 lm/W
Color Consistency**	6 Step MacAdam Ellipse (6 SDCM)

* tolerance +/- 10% ** center point (0.463, 0.42)

C. Lifetime

(Supplied Voltage: AC230V; Ambient Temperature: 15°C~40°C)

Lumen Maintenance Factor	70% of the rated lifetime
Rated Lifetime – L ₇₀ B ₅₀	15,000 hrs
Switching Cycle s	≥ 15,000

D. Temperature Operation

Normal operation temperature	-20°C ~ 40°C
Relative Humidity	10% ~ 90%

E. Geometric Data


Maximum overall length	119 ± 5 mm (4.68 ± 0.197 inch)
Maximum diameter	35 ± 5 mm (1.38 ± 0.197 inch)
Mass	13 ± 5 g

F. Environmental relevant materials

Mercury (Hg)	Comply with RoHS Directive 2011/65/EU
Lead (Pb)	
Cadmium(Cd)	
Hexavalent Chromium(Cr6+)	
Polybrominated Biphenyls(PBBs)	
Polybrominated Diphenyl Ethers(PBDEs)	

2. Outline Drawing

Unit : mm

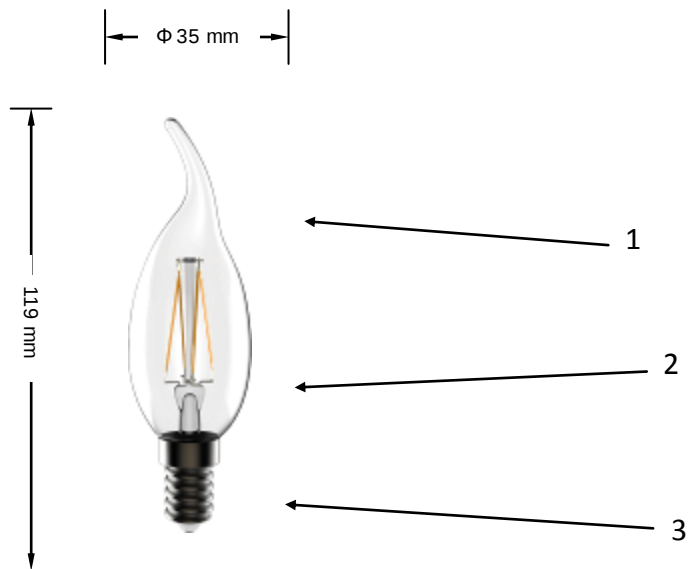


Material Information


- 1. Globe : Glass
- 2. Body : Glass
- 3. Base : Metal

3. Light Distribution Curve

FWHM 320°

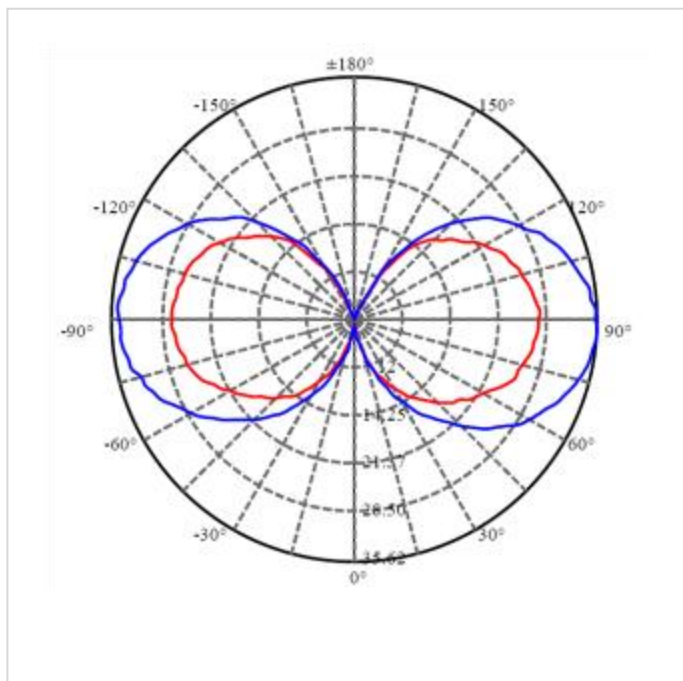

4. Spectrum Distribution

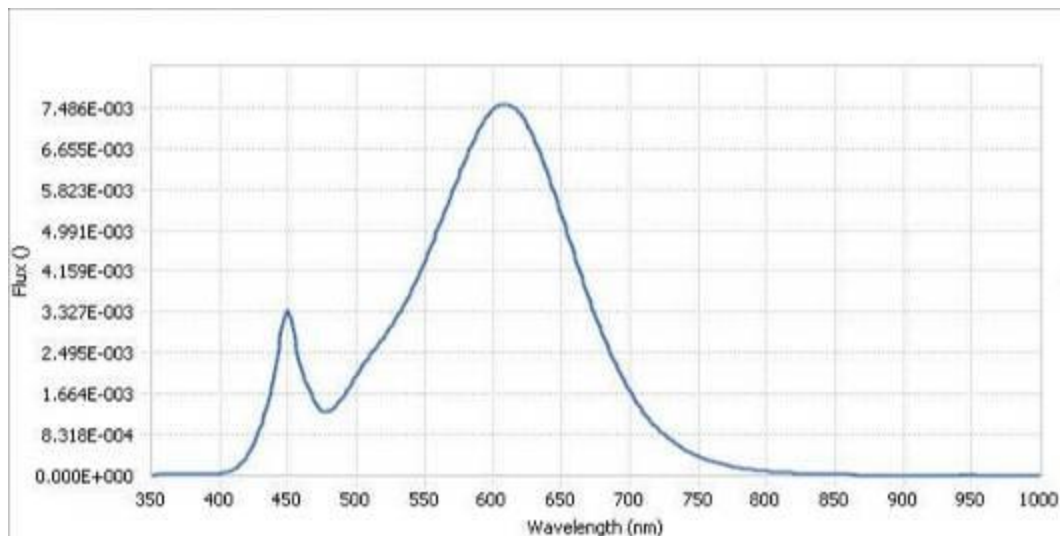

5. Warnings

Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.

6. Cautions

Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space). Not intended for use with emergency light fixtures or exit lights.

7. Notes

All characteristics are estimated at room temperature (25°C), free air burning, base up burning position and at rated voltage. In view of the complex manufacturing process for light above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technic individual products may vary from the typical values.

8. Logistic information

Model	Dimmable CL35 Filament 40W E14
Pieces per pack	1
Product Code	00501760620A
EAN code on pack	4712947606202
Size of pack	40×40×141 mm
Weight per pack (G.W)	0.0295 kg
Packs per inner box	N/A
EAN code on inner box	N/A
ITF code on inner box	N/A
Size of inner box	N/A
Weight per inner box(G.W)	N/A
Packs per outer box	160
EAN code on outer box	4712947607636
ITF code on outer box	64712947606204
Size of outer box	425×340×300 mm
Weight per outer box(G.W)	5.8 kg

9. Conformity

2014/35/EU; Low Voltage Directive	EN 62560: 2012 、 EN 62471: 2008 、 EN 62493: 2015
2014/30/EU; EMC Directive	EN 55015: 2013 、 EN 61547: 2009 EN 61000-3-2: 2014 、 EN 61000-3-3: 2013
2009/125/EC; ErP Directive	EU Regulation 244/2009 、 874/2012 、 1194/2012
2011/65/EU; RoHS Directive	EN 50581: 2012

10. Business Scheme (Countries)

A. Applicable countries

France, Italy, Belgium, Spain, Morocco, Portugal, Netherlands, Luxembourg, Germany, Turkey, Greece, Austria, Switzerland, Bulgaria, Poland, Hungary, Israel, Sweden, Norway, Ireland, England

Note : The requirement of each country will be reflected to the products specifications, when the products will be shipped to such country.

B. Manufacture

Unity Opto Technology Co., Ltd.

C. Sales channel

B2B flow and B2C